



Finish
Crown finish 29 spumante
CETIE GME 13.05


Front view

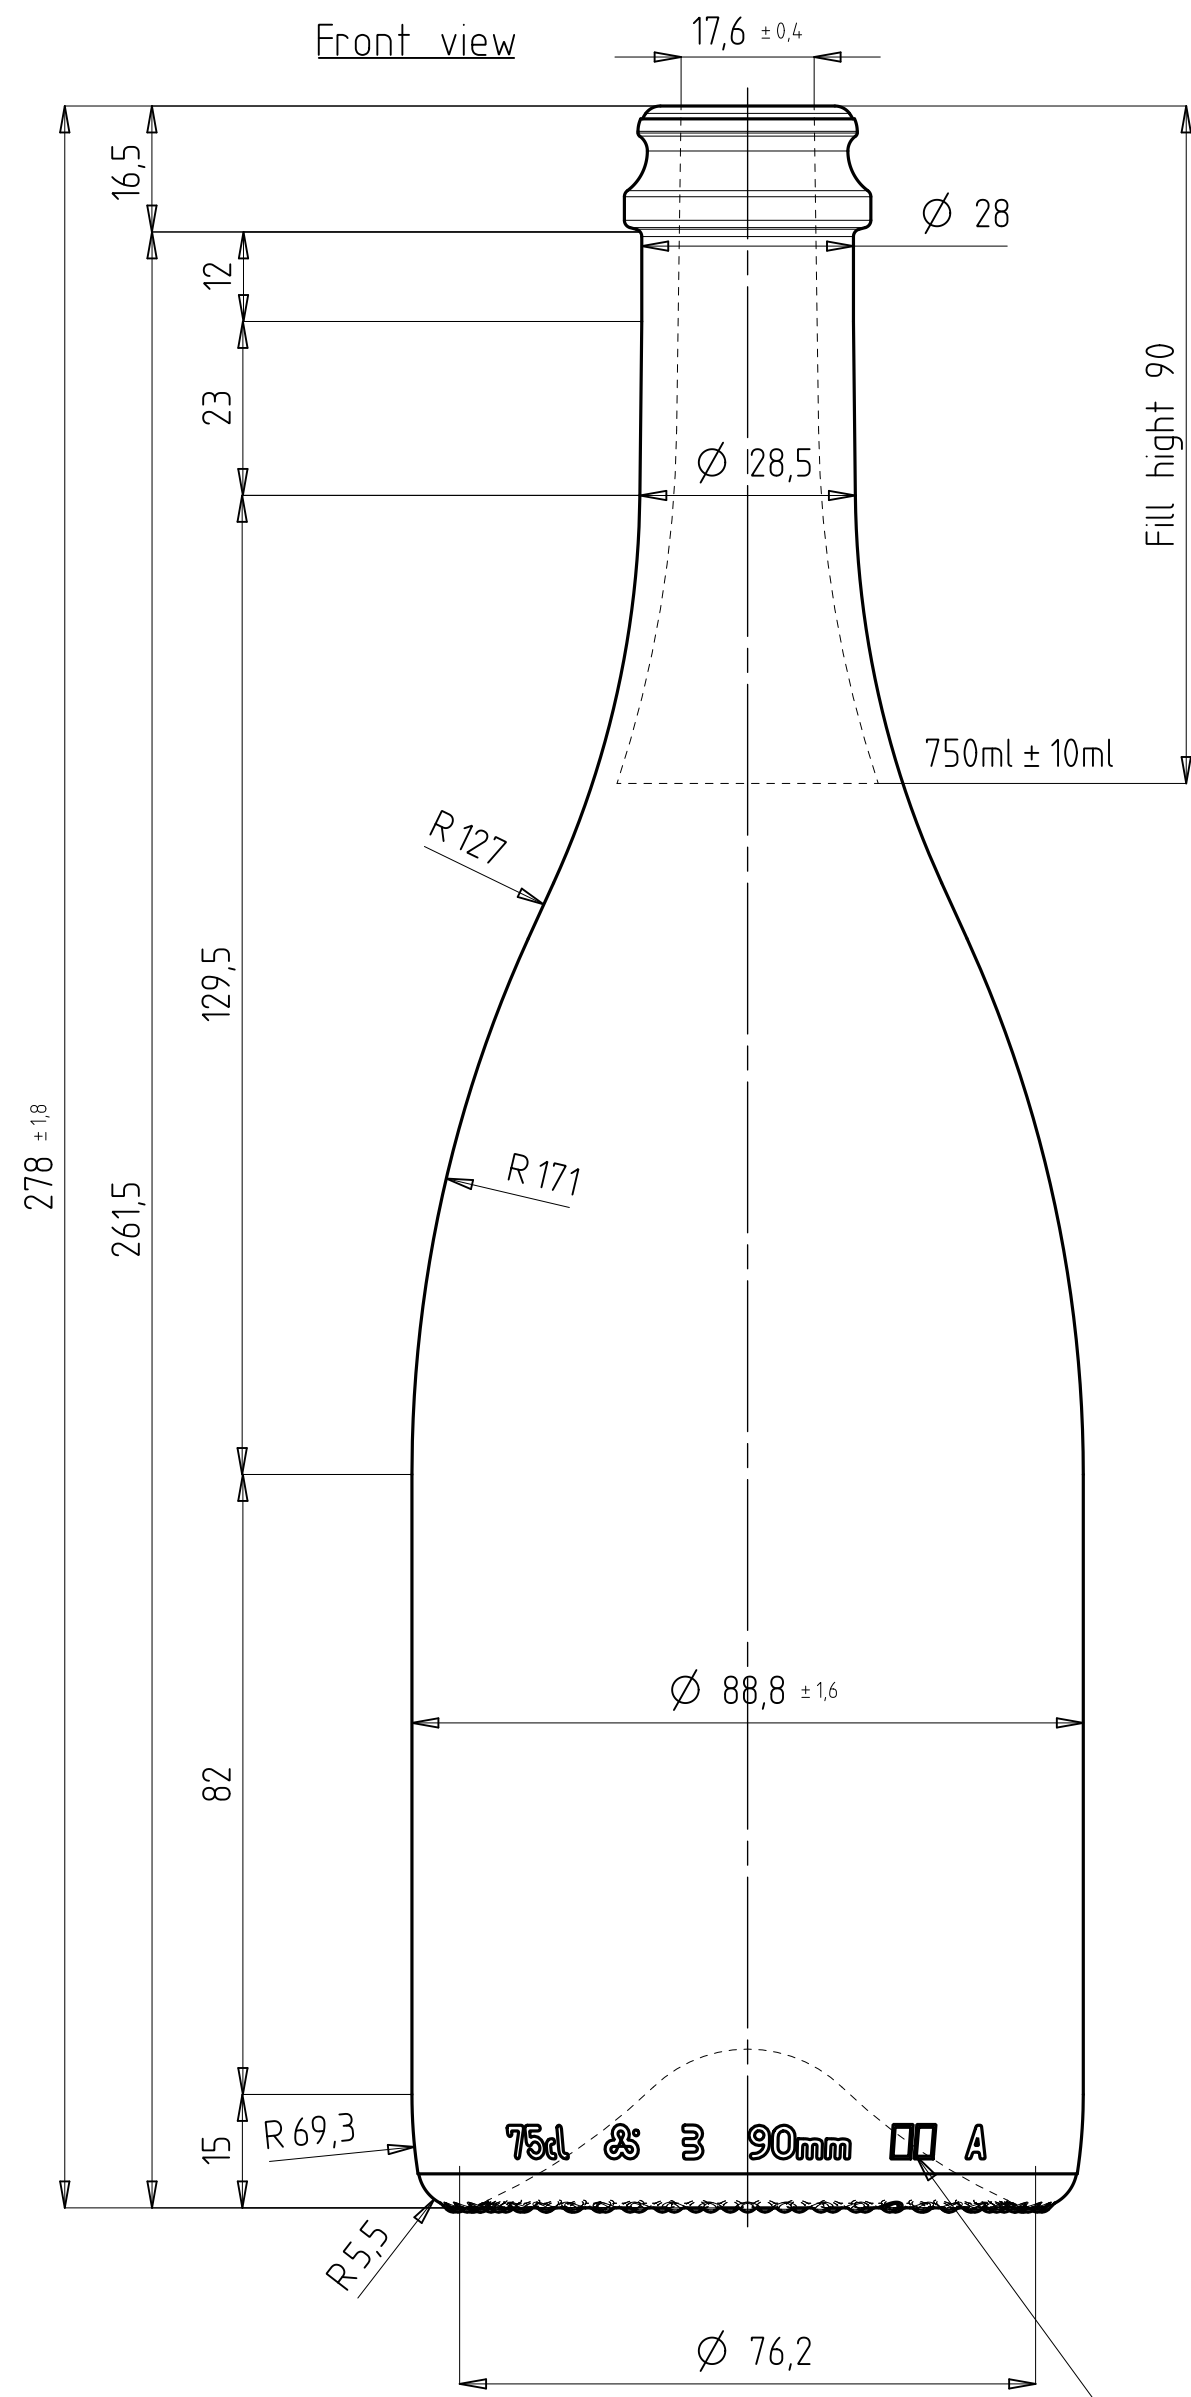

Back view

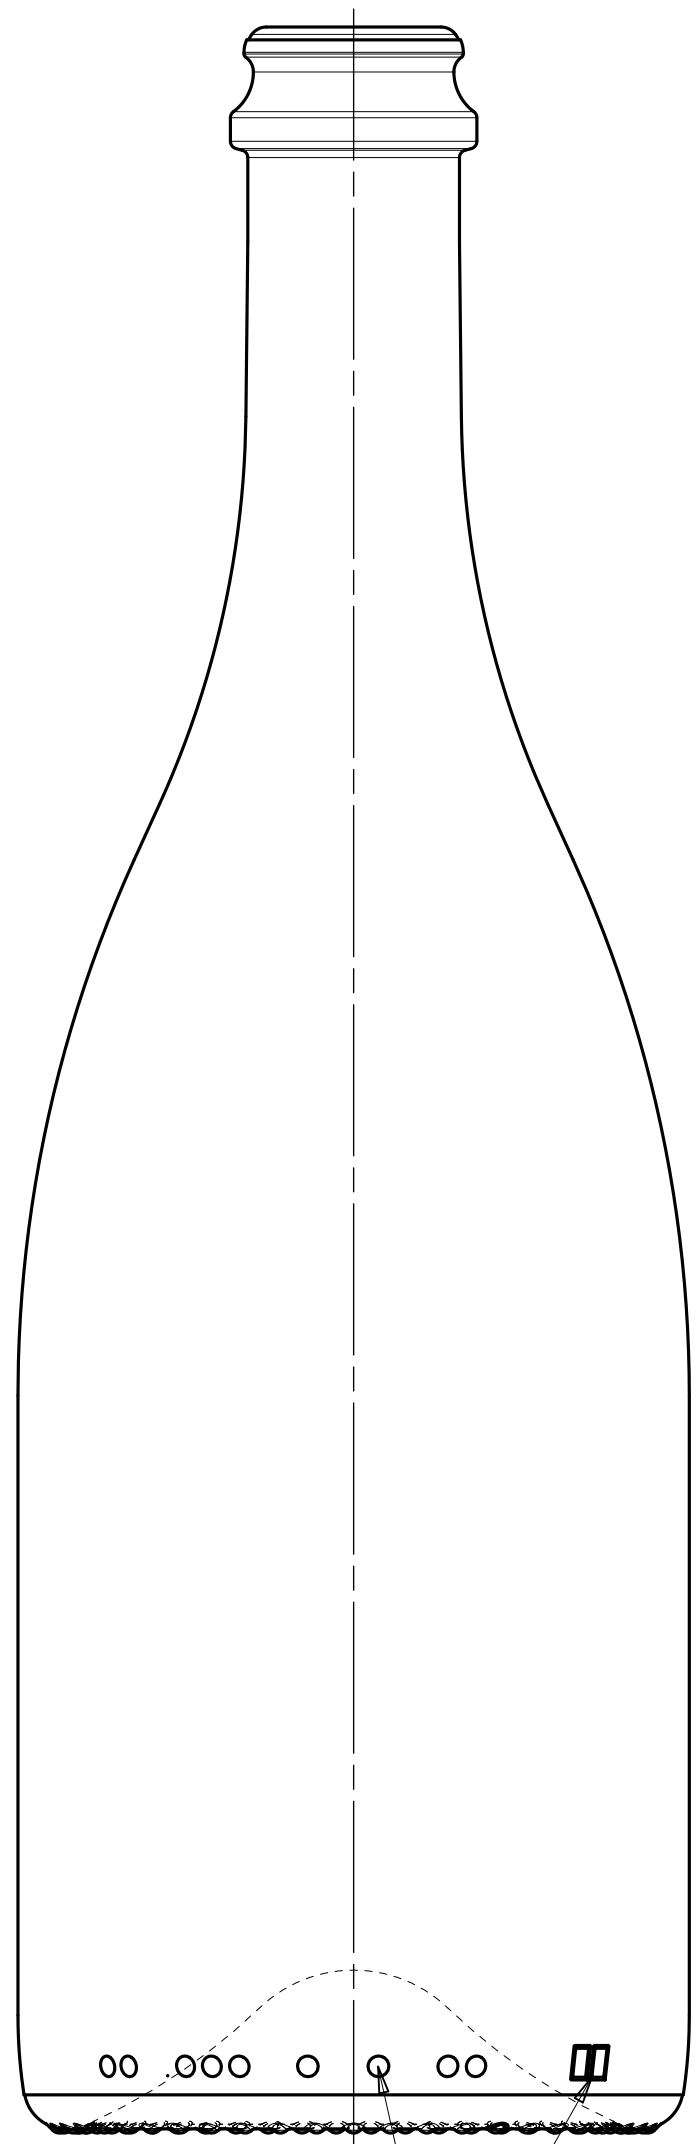

Bottom view

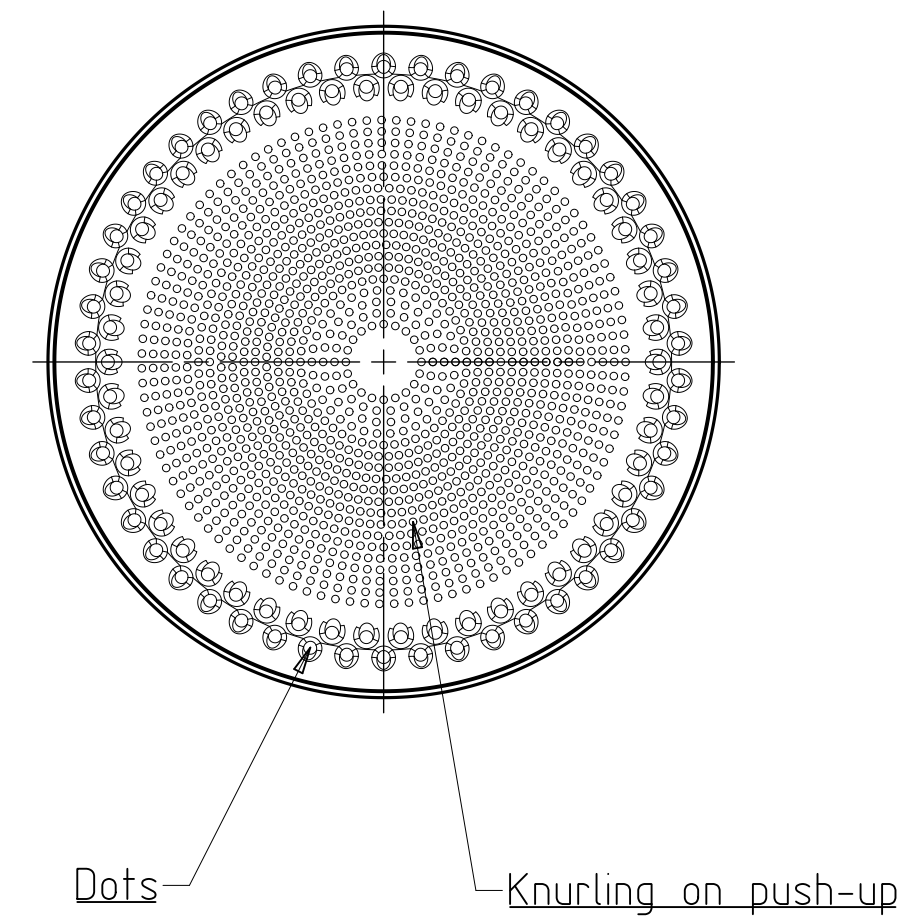

Long term pressure 7 bar Max
Peak pressure 10 bar Max
Not intended for "methode classique"

Production year

Dot code + mould number

INDEX	ZMENY / modifications	DAT	JMENO	SOUHLAS TECHNOLOGA PT approved	DAT	VIS	TEPLOTA PLNENI Filling temperature	≤ °c	NOMINAL OBJEM Capacity fillpoint	750 ml ± 10 ml	POZNAMKA Remarks	MaxTherm dT=42 C					
B	Weight increase, rename, stamps changes	9.7.15	Pam	SOUHVYR TYMU FIB approved	VYRZAVOD VMG	DAT 16.07.19	VIS PRE	TEPLOTA ZPRACOVANI Conditioning temperature	≤ 57 °c	TOTAL OBJEM Capacity brimful	783 ml ± ml	ZAKAZNIK Customer	Standard				
C	Heel profile change	28.7.15	Pam														
D	Long term pressure, peak pressure	17.9.15	Pam														
E	Bottom profile redesign, stippling redesign	13.17	Pam														
F	Redesign	24.6.19	Sat	FS SOUHLAS FS approved	VYRZAVOD VMG	DAT 16.07.19	VIS Fil	OBSAH CO ₂ CO ₂ content	≤ 10 g/l	HMOTNOST Approx glass weight	596 g	PODOBNY JAKO Similar to					
								OBSAH ALKOHOLU Alcohol content	≤ 14 Vol%	STREDNI TLOUSTKA STENY Average wall thickness	3,74 mm	NAHRAZUJE Replace No	5C002.0750.1231.E				
								AXIALNI ZATIZENI Axial pressure	600 daN	PRIMER POD USTIM Neck connection dia	28 mm	NABIJKA CISLO Offer No	E5C0315.0750.1231.A				
								POUZITI Disposal	MW AW EW	MINTRNI PRUMER KALIBRU Min through bore	17,0 mm	MERITKO Scale	1.1				
								PROCES Process	BB PB EPB	BARVA Color		KRESLIL Des	Pam	DAT 17.09.15	DATA TYP Filetyp	AZ	
								NETOLEROVANE ROZMERY DLE DIN 6129 dimensions without tolerances conform to standard DIN 6129				POZNAMKA Designation	SP BACC090 596g SK17,6 750ml SP BACCO 596	VYROBEK CISLO Item No	5C002.0750.1231	INDEX	F

vetropack
Vetropack Moravia Glass a.s.
CZ-69701 Kyjov
Tel. 00420-518 603 111
www.vetropack.com

5C002.0750.1231