

PPA/PPC 9-12-18-26-35-45

**PRESSA PNEUMATICA**  
PNEUMATIC PRESS



**EV**  
**ENOVENETA**  
TECNOLOGIE ENOLOGICHE



# PRESSA PNEUMATICA | PNEUMATIC PRESS

## CARATTERISTICHE DI SERIE:

- Telaio in acciaio inox AISI 304 su ruote
- PLC programmabile con display 12", completo di opzione "fast" e concatenamento programmi di pressatura
- Valvola di carico assiale
- Quadro di automazione per pompa di carico assiale e scarico mosto
- Compressore centrifugo e soffiante integrati
- Vasca raccolta mosto estraibile (PP 9, 12)
- Vasca raccolta mosto sospesa (PP 18, 26, 35, 45)
- Voltaggio standard 400/3/50 (PP 9, 12 anche 230/1/50)

## STANDARD FEATURES:


- AISI 304 stainless steel frame on wheels
- Programmable PLC with 12" display, complete of "fast" option and pressing program linking
- Axial feeding valve
- Control panel for axial pump and must discharge
- Integrated compressor and blower
- Extractable must collecting basin (PP 9, 12)
- Hang up must collecting basin (PP 18, 26, 35, 45)
- Standard voltage 400/3/50 (PP 9, 12 also 230/1/50)

## ACCESSORI:

- Valvola di carico assiale pneumatica (PP 45)
- Pressostato per carico assiale
- Sonde di livello per vasca di scarico mosto
- Valvola pneumatica per selezione mosto
- Porta pneumatica (PP 45)
- Chiusura ermetica della porta (solo modelli PPC)
- Dispositivo iniezione gas inerte (solo modelli PPC)
- Compressore ausiliario porta pneumatica (PP 45)
- Vasca raccolta mosto su ruote
- Lavaggio esterno cilindro (per modelli PPA)
- Lavaggio interno canalette (per modelli PPC)
- Telaio su ruote motorizzate (PP 26, 35, 45)
- Rialzi gambe

## OPTIONALS:

- Pneumatic axial feeding valve (PP 45)
- Axial load pressure switch
- Must collecting basin level probes
- Must selection pneumatic valve
- Pneumatic door (PP 45)
- Hermetic door sealing (only PPC models)
- Inert gas injection system (only PPC models)
- Auxiliary compressor for pneumatic door (PP 45)
- Must collecting basin on wheels
- External washing system (only PPA models)
- Draining channels washing system (only PPC models)
- Wheels motorization (PP 26, 35, 45)
- Legs extension

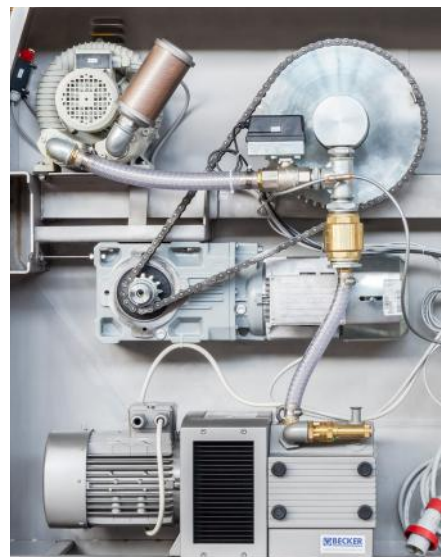

## DATI TECNICI | TECHNICAL DATA

		9	12	18	26	35	45
Uva intera   <i>Whole grape</i>	Ton	0.6/0.7	0.8/0.9	1.2/1.4	1.7/1.9	2.3/2.6	3.0/3.3
Uva diraspata/pigiata   <i>Destemmed/pressed grape</i>	Ton	1.8/2.0	2.5/3.0	3.5/4.5	5.0/6.0	6.5/8.0	9.5/10.5
Massa fermentata   <i>Fermented mass</i>	Ton	2.6/2.8	3.5/4.5	5.0/6.5	7.5/9.0	10.0/12.0	14.0/18.0
Valvola carico assiale   <i>Axial load valve</i>	ø mm	80	100	100	100	100 (120)	120
Raccordo vasca raccolta mosto   <i>Must collecting basin fitting</i>	ø mm	60	60	60	60	60	80
Capacità vasca raccolta mosto   <i>Must collecting basin capacity</i>	lt	225	350	200	230	230	450
Potenza motore rotazione   <i>Rotation motor power</i>	kW	0.75	0.75	0.75	1.1	1.5	2.2
Potenza compressore   <i>Compressor power</i>	KW	2.2	2.2	2.2	3.0	4.0	4.0
Potenza soffiante   <i>Blower power</i>	kW	0.37	0.37	0.37	0.37	1.1	1.5

## DIMENSIONI | DIMENSIONS

Lunghezza   <i>Length</i>	mm	2310	2650	3400	3450	4050	4700
Profondità   <i>Depth</i>	mm	1250	1400	1400	1570	1600	1900
Altezza   <i>Height</i>	mm	1550	1650	1650	1850	1850	2000
Peso   <i>Weight</i>	Kg	470	630	780	970	1100	1700

Dati e misure non sono impegnativi e possono essere variati senza preavviso.

*Measurements and operating data are approximative, not legally binding and subject to change without notice.*





#### **ENOVENETA S.p.A.**

Via Marconi, 56  
35016 Piazzola sul Brenta (PD) - ITALY  
Tel. +39 049 5590358  
Fax. +39 049 9600002  
info@enoveneta.it

#### **ENOVENETA France**

ZAC de Nicopolis, 292 Rue Vermentino  
83170 Brignoles - FRANCE  
Tel. +33 04 94 04 54 13  
Fax. +33 04 94 04 03 33  
france@enoveneta.it

#### **ENOVENETA Brasil**

Bairro Santa Catarina  
Caxias do Sul  
Rio Grande do Sul - BRASIL

Rivenditore autorizzato - Dealer

